
Hydraulink

METRIC 24°

S81C

METRIC LIGHT FEMALE STRAIGHT
24° CONE SWIVEL NUT

- ISO 12151-5

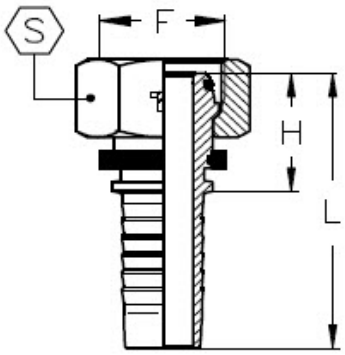

Part Number	Metric Female Thread - F	Hose I.D (in)	Hose I.D (mm)	Dash size	Tube Size	Hex A/F - S (mm)	Cutoff - H (mm)	Length - L (mm)	Working Pressure (bar)
S81C-M1203	M12x1.5	3/16	5	03	6	14	21	46	280
S81C-M1204	M12x1.5	1/4	6.4	04	6	17	23	51	280
S81C-M1404	M14x1.5	1/4	6.4	04	8	17	22	50	280
S81C-M1604	M16x1.5	1/4	6.4	04	10	19	24	52	280
S81C-M1605	M16x1.5	5/16	7.9	05	10	19	24	52	280
S81C-M1606	M16x1.5	3/8	9.5	06	10	19	23	54	280
S81C-M1804	M18x1.5	1/4	6.4	04	12	22	24	52	280
S81C-M1806	M18x1.5	3/8	9.5	06	12	22	24	54	280
S81C-M1808	M18x1.5	1/2	12.7	08	12	22	28	61	280
S81C-M2206	M22x1.5	3/8	9.5	06	15	27	24	54	280
S81C-M2208	M22x1.5	1/2	12.7	08	15	27	24	57	280
S81C-M2608	M26x1.5	1/2	12.7	08	18	32	26	59	210
S81C-M2610	M26x1.5	5/8	15.9	10	18	32	27	62	210
S81C-M2612	M26x1.5	3/4	19	12	18	32	34	75	210
S81C-M3010	M30x2	5/8	15.9	10	22	36	28	64	210
S81C-	M30x2	3/4	19	12	22	36	31	71	210

Please contact Hydraulink for further details and availability. Hydraulink reserve the right to change technical specifications without notice.

M3012									
S81C-M3612	M36x2	3/4	6.3	12	28	41	28	69	100
S81C-M3616	M36x2	1	25.4	16	28	41	34	90	100
S81C-M4520	M45x2	1 1/4	31.8	20	35	50	40	106	100

Please contact Hydraulink for further details and availability. Hydraulink reserve the right to change technical specifications without notice.