


## STRAIGHT ADAPTORS

### TR

FEMALE ORFS X ORFS MALE

ORFS FEMALE SWIVEL NUT X MALE ORFS

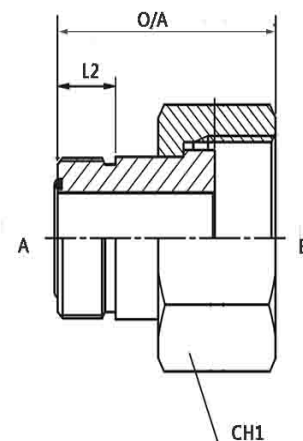

| Part Number | ORFS Female Thread (B) | ORFS Male Thread (A) | Overall Length (mm) | L2 (mm) | Hex A/F - CH1 (mm) | PN (bar) |
|-------------|------------------------|----------------------|---------------------|---------|--------------------|----------|
| TR-1109     | 11/16-16               | 9/16-18              | 29.2                | 10      | 20.6               | 630      |
| TR-1309     | 13/16-16               | 9/16-18              | 32.8                | 10      | 23.8               | 630      |
| TR-1311     | 13/16-16               | 11/16-16             | 33.3                | 11.2    | 23.8               | 630      |
| TR-1609     | 1-14                   | 9/16-18              | 36.4                | 10      | 28.6               | 400      |
| TR-1611     | 1-14                   | 11/16-16             | 37.8                | 11.2    | 28.6               | 400      |
| TR-1613     | 1-14                   | 13/16-16             | 38.9                | 12.8    | 28.6               | 400      |
| TR-1909     | 1.3/16-12              | 9/16-18              | 39.3                | 10      | 34.6               | 400      |
| TR-1911     | 1.3/16-12              | 11/16-16             | 39.9                | 11.2    | 34.9               | 400      |
| TR-1913     | 1.3/16-12              | 13/16-16             | 42.2                | 12.8    | 34.9               | 400      |
| TR-1916     | 1.3/16-12              | 1-14                 | 43.9                | 15.5    | 34.9               | 400      |
| TR-2313     | 1.7/16-12              | 13/16-16             | 43.9                | 12.8    | 41.3               | 400      |
| TR-2316     | 1.7/16-12              | 1-14                 | 45.7                | 15.5    | 41.3               | 400      |
| TR-2319     | 1.7/16-12              | 1.3/16-12            | 47.8                | 17      | 41.3               | 400      |
| TR-2719     | 1.11/16-12             | 1.3/16-12            | 47.8                | 17      | 47.6               | 250      |
| TR-2723     | 1.11/16-12             | 1.7/16-12            | 51.6                | 17.5    | 47.6               | 250      |