


## SLIMLINE WIRE BRAID HOSE

### H17

#### R17 ONE/TWO WIRE BRAID HOSE BRAIDED WIRE REINFORCED HOSE - SAE 100R17

- Due to manufacturing tolerances, the external dimension is an average.
- Recommended for: Medium pressure hydraulic applications.
- Suitable for: Mineral & vegetable oils, water-based solutions, water, air & inert gases.
- Internal tube: Synthetic rubber.
- Reinforcement: One high-tensile steel braid for sizes -04, -06, -08 and two high-tensile steel braids for sizes -12, -16:
- External cover: Weather & high abrasion resistance synthetic rubber. MSHA approved.
- Temperature range: -40°C to 100°C (125°C discontinuous)
- Standards: SAE 100R17.
- Characteristics: Compact construction, extra flexible.

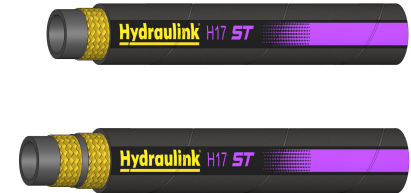

Part Number	Internal Size	Internal Diameter - DN	Internal Diameter - inches	External Diameter - mm	Working Pressure - psi	Working pressure - bar	Min burst pressure - psi	Min burst pressure - bar	Min bend radius - mm
H17-05ST	05	8		14	3000	210	12000	840	55
H17-04ST	04	6		12.3	3000	210	12000	840	50
H17-06ST	06	10		15.9	3000	210	12000	840	65
H17-08ST	08	12		19.1	3000	210	12000	840	90
H17-12ST	12	19		28	3000	210	12000	840	100
H17-16ST	16	25	1	35.3	3000	210	12000	840	150