
Hydraulink

AUTOMOTIVE HOSE

27000FUEL

FUEL LINE

FUEL LINE SAE 30R6 AND 30R7

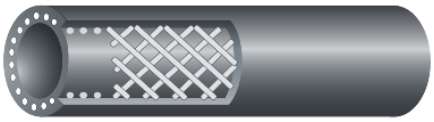

- Due to manufacturing tolerances, the external dimension is an average.
- Recommended for: Use on fuel lines, PCV and EEC systems, and for fuel return hose connections on diesel fuel injection systems.
- Approved for use with leaded and unleaded petrol, diesel, methanol, and ethers.
- Internal tube: Nitrile.
- Reinforcement: Spiral reinforced construction.
- External cover: Oil resistant NBR/PVC cover.
- Temperature: -40°C to 125°C with gasoline blends.
- Standards: Meets SAE 30R6 and 30R7.

Part Number	Internal Size	Internal Diameter (mm)	Working Pressure (psi)	Working pressure (bar)
27000	1/8	3.2	50	4
27001	3/16	4.8	50	4
27002	1/4	6.3	50	4
27003	5/16	8	50	4
27004	3/8	9.5	50	4
27005	7/16	11.1	35	2.4
27006	1/2	12.7	35	2.4
27008	5/8	15.9	35	2.4
27010	3/4	19	35	2.4

Please contact Hydraulink for further details and availability. Hydraulink reserve the right to change technical specifications without notice.