
Hydraulink

## LOW PRESSURE HOSE

# RWPS09

MAXIMUS PETROLEUM SUCTION
RUBBER OIL SUCTION - 150 PSI

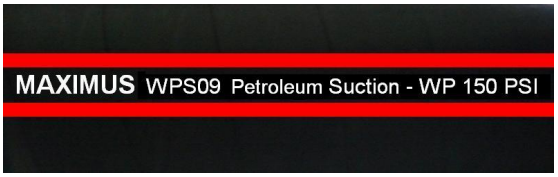


- Conforming Standards: AS2683 Type 1; Grade 2; Kind 1
- Temperature: -20°C to +80°C
- Cover: Black; Smooth Wrapped Finish SBR Rubber
- Tube: Black; NBR Rubber Compound
- Reinforcement: High Strength Synthetic Cord Plus Embedded Steel Helix Wire
- Application: Lightweight Suction Hose for the transfer of petroleum products with an aromatic content up to 30%. Resistant to Abrasion And Weather.

| Part Number | Hose I.D (mm) | Hose O.D (mm) | Working Pressure (psi) | Working pressure (bar) | Min burst pressure (psi) | Min burst pressure (bar) |
|---|---|---|---|---|---|---|
| RWPS09-102 | 101.6 | 118 | 150 | 10.4 | 450 | 31 |

Please contact Hydraulink for further details and availability. Hydraulink reserve the right to change technical specifications without notice.