
Hydraulink

METRIC 24°

S79C

METRIC HEAVY FEMALE STRAIGHT
24° CONE SWIVEL NUT

- ISO 12151-5

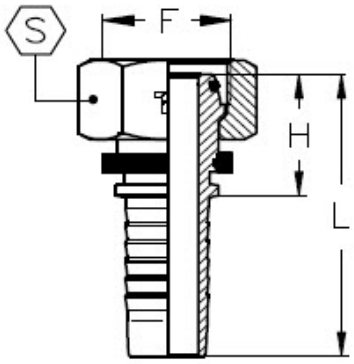

Part Number	Metric Female Thread - F	Hose I.D (in)	Hose I.D (mm)	Dash size	Tube Size	Hex A/F - S (mm)	Cutoff - H (mm)	Length - L (mm)	Working Pressure (bar)
S79C-M1404	M14x1.5	1/4	6.4	04	6	17	23	51	450
S79C-M1604	M16x1.5	1/4	6.4	04	8	19	22	50	450
S79C-M1606	M16x1.5	3/8	9.5	06	8	19	26	56	450
S79C-M1804	M18x1.5	1/4	6.4	04	10	22	24	52	450
S79C-M1806	M18x1.5	3/8	9.5	06	10	22	25	55	450
S79C-M2005	M20x1.5	5/16	7.9	05	12	24	24	52	350
S79C-M2006	M20x1.5	3/8	9.5	06	12	24	24	54	450
S79C-M2008	M20x1.5	1/2	12.5	08	12	22	28	61	415
S79C-M2206	M22x1.5	3/8	9.5	06	14	27	28	58	450
S79C-M2208	M22x1.5	1/2	12.7	08	14	27	28	61	420
S79C-M2408	M24x1.5	1/2	12.7	08	16	30	29	62	420
S79C-M3010	M30x2	5/8	15.9	10	20	36	33	69	350
S79C-M3012	M30x2	3/4	19	12	20	36	36	76	350
S79C-M3612	M36x2	3/4	19	12	25	46	38	78	350
S79C-M3616	M36x2	1	25.4	16	25	46	41	97	380
S79C-	M42x2	1	25.4	16	30	50	42	98	380

Please contact Hydraulink for further details and availability. Hydraulink reserve the right to change technical specifications without notice.

M4216									
S79C-M4220	M42x2	1 1/4	31.8	20	30	50	43	109	325
S79C-M5220	M52x2	1 1/4	31.8	20	38	60	48	115	325

Please contact Hydraulink for further details and availability. Hydraulink reserve the right to change technical specifications without notice.