


STRAIGHT ADAPTORS

G-N

JIC MALE X UNO MALE

JIC MALE X UNO FIXED STUD STRAIGHT

- ISO 8434-2

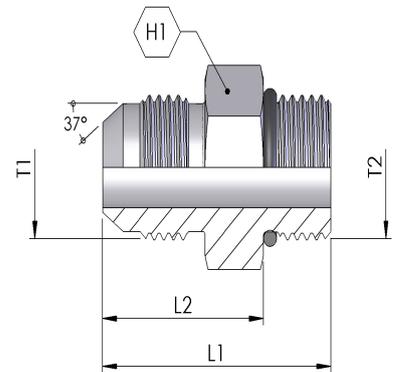

Part Number	T1	T2	H1 (mm)	L1 (mm)	L2 (mm)	PN (bar)
G-N-0707	7/16-20	7/16-20	14	31	22	350
G-N-0707-1MM	7/16-20	7/16-20	31.2	14	9.1	350
G-N-0709	7/16-20	9/16-18	17	33	23	350
G-N-0712	7/16-20	3/4-16	22	35	14	350
G-N-0714	7/16-20	7/8-14	37.8	14	12.7	350
G-N-0717	7/16-20	1.1/16-12	42.2	14	15.1	350
G-N-0807	1/2-20	7/16-20	14	33	14	350
G-N-0808	1/2-20	1/2-20	16	33	14	350
G-N-0809	1/2-20	9/16-18	18	33	14	350
G-N-0812	1/2-20	3/4-16	22	33	14	350
G-N-0907	9/16-18	7/16-20	16	32	14	350
G-N-0908	9/16-18	1/2-20	16	32	14	350
G-N-0909	9/16-18	9/16-18	17	33	23	350
G-N-0912	9/16-18	3/4-16	22	35	24	350
G-N-0912-1MM	9/16-18	3/4-16	35.1	14.2	11.1	350
G-N-0914	9/16-18	7/8-14	25	38	14	350
G-N-0914-1MM	9/16-18	7/8-14	38.1	14.2	12.7	350
G-N-0917	9/16-18	1.1/16-12	32	42	14	350
G-N-1207	3/4-14	7/16-20	37.8	16.7	9.1	310
G-N-1209	3/4-14	9/16-18	21	37	17	310
G-N-1212	3/4-16	3/4-16	22	38	27	310
G-N-1212-1.5MM	3/4-14	3/4-16	37.6	16.7	11.1	310
G-N-1214	3/4-16	7/8-14	27	41	28	310
G-N-1217	3/4-14	1.1/16-12	32	45	17	310
G-N-1221	3/4-14	1.5/16-12	38	45	17	310
G-N-1409	7/8-14	9/16-18	25	42	19	240
G-N-1412	7/8-14	3/4-16	24	42	19	240

G-N-1414	7/8-14	7/8-14	27	43	30	240
G-N-1417	7/8-14	1.1/16-12	32	47	19	240
G-N-1421	7/8-14	1.5/16-12	38	48	19	240
G-N-1712	1.1/16-12	3/4-16	29	49	22	240
G-N-1714	1.1/16-12	7/8-14	29	48	22	240
G-N-1717	1.1/16-12	1.1/16-12	32	50	35	240
G-N-1719	1.1/16-12	1.3/16-12	35	50	35	240
G-N-1721	1.1/16-12	1.5/16-12	38	51	22	240
G-N-1726	1.1/16-12	1.5/8-12	48	53	22	240
G-N-2112	1.5/16-12	3/4-16	52	23	11.1	210
G-N-2114	1.5/16-12	7/8-14	52	23	12.7	210
G-N-2117	1.5/16-12	1.1/16-12	35	52	23	210
G-N-2121	1.5/16-12	1.5/16-12	38	52	23	210
G-N-2126	1.5/16-12	1.5/8-12	48	54	23	210
G-N-2130	1.5/16-12	1.7/8-12	55.9	23	15.1	210
G-N-2617	1.5/8-12	1.1/16-12	58.4	24	15.1	170
G-N-2621	1.5/8-12	1.5/16-12	43	59	24	170
G-N-2626	1.5/8-12	1.5/8-12	48	55	24	170
G-N-2630	1.5/8-12	1.7/8-12	54	57	24	170
G-N-3026	1.7/8-12	1.5/8-12	51	64	28	140
G-N-3030	1.7/8-12	1.7/8-12	54	64	24	140